

HFE

Single Phase Energy Optimising Soft Starter

The HFE is the ideal 'retrofit' energy optimising solution for Soft Starting single phase compressors such as those used in Supermarket refrigerators and chillers etc, and can yield between 10 -18% energy savings.

It has a rugged tin lid construction and can be mounted easily next to the machine or control panel. Installation of the unit is quick and simple due to the two wires in, two wires out' design. The unit is 'fit and forget' and there is no maintenance for the user.



Main Features

Retrofit, quick fit, simple wiring.

- ✓ Quick and simple two wire in/out implementation means low cost install in existing equipment and rapid return on investment through energy and maintenance cost reduction.

LED Indication

- ✓ Two LED's showing power and energy saving.

Energy Optimising.

- ✓ Reduces required energy consumption when the Chiller is not under load -10 - 18% saving in energy and related cost and carbon emissions.


Torque Reduction.

- ✓ Mechanical and electrical stress reduction or elimination means compressors last longer and require less maintenance.

'Fit and Forget'

- ✓ No maintenance time or associated cost

Model (IP43)	Current (I)	Motor kW (240V)	Motor HP (240V)
HFE Size 1	10	1.1	1.5
HFE Size 2	30	4	5.5

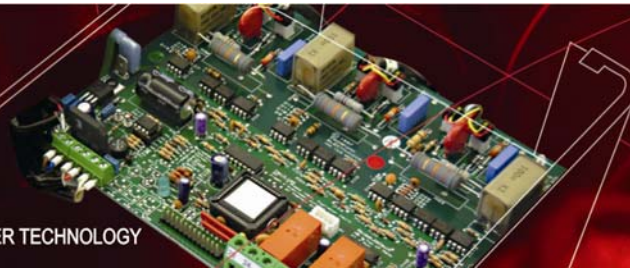

Operational Voltage (Ue)	110 – 230 VAC or (-15% to +10%) Single Phase
Frequency	50/60 Hz +/- 2Hz
Operational Current (Ie)	HFE Size 1 – 10A Continuous HFE Size 2 – 30A Continuous
Start Duty	Please refer to Basic Guides – FD1945 and FD2025.
Ingress Protection	IP30 with standard cover.
Start Time	Approx 0.5 to 5 Seconds continuously variable
Pedestal Voltage	Fixed at approx 15%
Ambient Temperature	0°C to 40°C without de rating.
Design Standards	IEC 60947-4-2, EN 60947 – 4- 2 "AC Semiconductor Motor Controllers and Starters"
Ideal Applications	<ul style="list-style-type: none"> • Refrigeration Systems • Conveyors • Oven Fans • Chillers • Coolers • Air Conditioners

